


DCP Layer Strength Analysis Report

Project Name: POLLI COELHO


Chainage (km): 1,000
 Direction:
 Location/Offset: Carriageway
 Cone Angle: 60 degrees
 Zero Error (mm): 0
 Test Date: 19/11/2009

Surface Type: Unpaved
 Thickness (mm): 0
 Base Type:
 Thickness (mm):
 Surface Moisture: Wet
 Moisture adjustment factor: Not adjusted

Layer Boundaries: Chainage 1,000

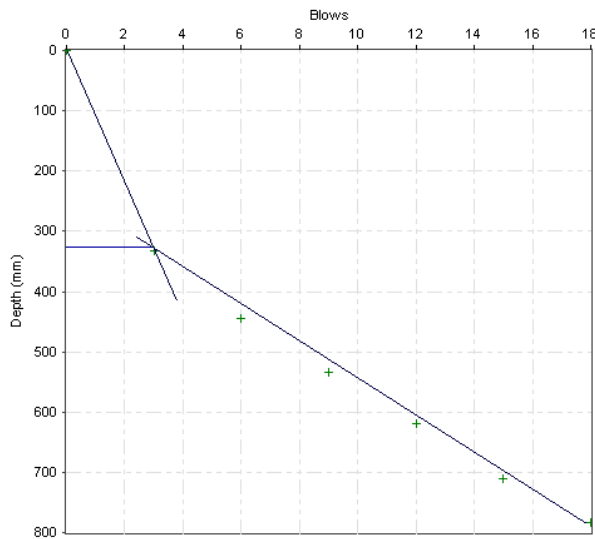

Layer Boundaries Chart

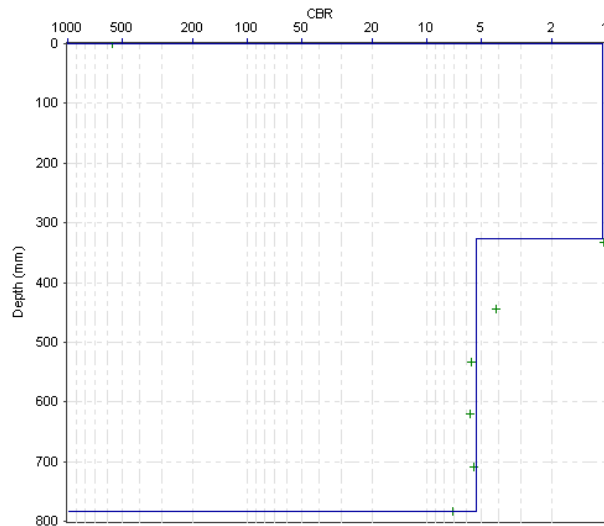

CBR Chart

Layer Properties

No.	Penetration Rate (mm/blow)	CBR (%)	Thickness (mm)	Depth to layer bottom (mm)	Position	Strength Coefficient	SN	SNC	SNP
1	109,70	1	327	327	Subgrade	--	--	--	--
2	30,86	5	456	783	Subgrade	--	--	--	--

Pavement Strength

Layer	Layer Contribution		
	SN	SNC	SNP
Surface	--	--	--
Base	--	--	--
Sub-Base	--	--	--
Subgrade	--	0,00	0,00
Pavement Strength	--	0,00	0,00

CBR Relationship:

Kleyn equation: $CBR = 410 \times (\text{Strength})^{(-1.27)}$ (when Strength > 2); $CBR = 66.66 \times (\text{Strength})^2 - 330 \times (\text{Strength}) + 563.33$ (when Strength <= 2)

Report produced by


DCP Layer Strength Analysis Report

Project Name: POLLI COELHO


Chainage (km): 2,000
 Direction:
 Location/Offset: Carriageway
 Cone Angle: 60 degrees
 Zero Error (mm): 0
 Test Date: 19/11/2009

Surface Type: Unpaved
 Thickness (mm): 0
 Base Type:
 Thickness (mm):
 Surface Moisture: Wet
 Moisture adjustment factor: Not adjusted

Layer Boundaries: Chainage 2,000

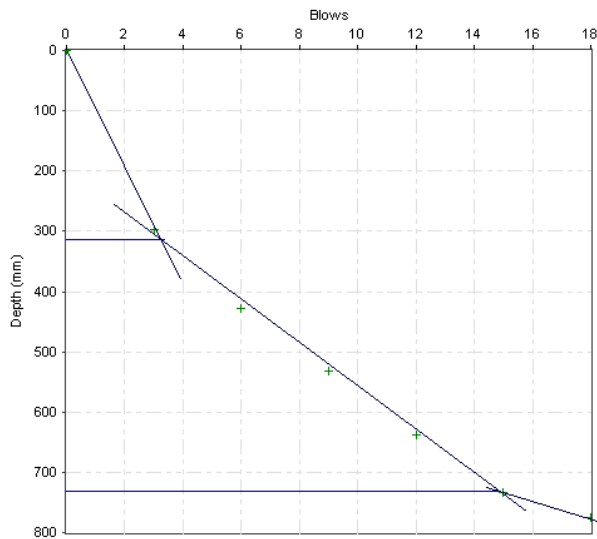

Layer Boundaries Chart

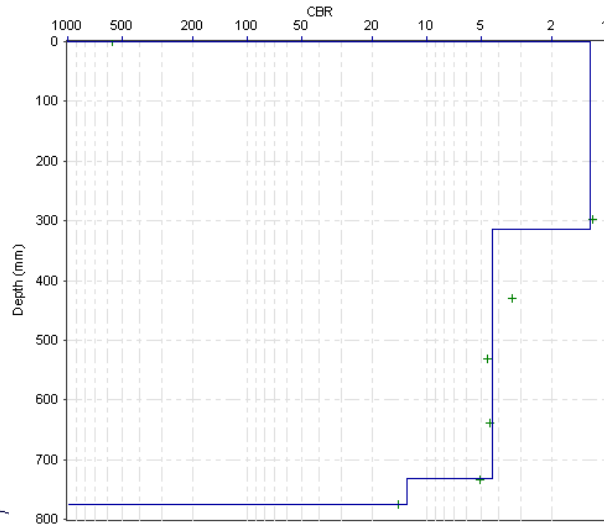

CBR Chart

Layer Properties

No.	Penetration Rate (mm/blow)	CBR (%)	Thickness (mm)	Depth to layer bottom (mm)	Position	Strength Coefficient	SN	SNC	SNP
1	97,23	1	314	314	Subgrade	--	--	--	--
2	35,90	4	417	731	Subgrade	--	--	--	--
3	15,15	13	45	776	Subgrade	--	--	--	--

Pavement Strength

Layer	Layer Contribution		
	SN	SNC	SNP
Surface	--	--	--
Base	--	--	--
Sub-Base	--	--	--
Subgrade	--	0,00	0,00
Pavement Strength	--	0,00	0,00

CBR Relationship:

Kleyn equation: $CBR = 410 \times (\text{Strength})^{(-1.27)}$ (when Strength > 2); $CBR = 66.66 \times (\text{Strength})^2 - 330 \times (\text{Strength}) + 563.33$ (when Strength <= 2)

Report produced by


DCP Layer Strength Analysis Report

Project Name: POLLI COELHO


Chainage (km): 3,000
 Direction:
 Location/Offset: Carriageway
 Cone Angle: 60 degrees
 Zero Error (mm): 0
 Test Date: 19/11/2009

Surface Type: Unpaved
 Thickness (mm): 0
 Base Type:
 Thickness (mm):
 Surface Moisture: Wet
 Moisture adjustment factor: Not adjusted

Layer Boundaries: Chainage 3,000

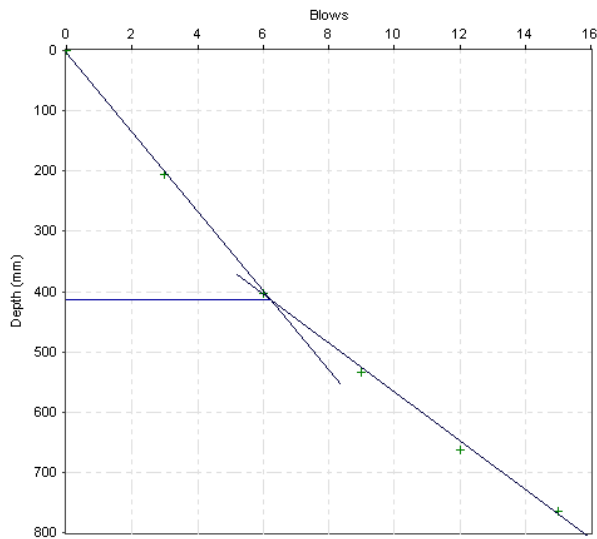

Layer Boundaries Chart

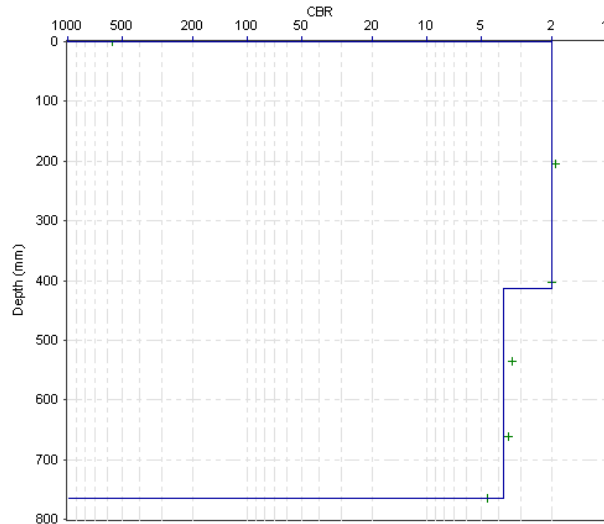

CBR Chart

Layer Properties

No.	Penetration Rate (mm/blow)	CBR (%)	Thickness (mm)	Depth to layer bottom (mm)	Position	Strength Coefficient	SN	SNC	SNP
1	65,74	2	414	414	Subgrade	--	--	--	--
2	40,48	4	351	765	Subgrade	--	--	--	--

Pavement Strength

Layer	Layer Contribution		
	SN	SNC	SNP
Surface	--	--	--
Base	--	--	--
Sub-Base	--	--	--
Subgrade	--	0,00	0,00
Pavement Strength	--	0,00	0,00

CBR Relationship:

Kleyn equation: $CBR = 410 \times (\text{Strength})^{(-1.27)}$ (when Strength > 2); $CBR = 66.66 \times (\text{Strength})^2 - 330 \times (\text{Strength}) + 563.33$ (when Strength <= 2)

Report produced by


DCP Layer Strength Analysis Report

Project Name: POLLI COELHO


Chainage (km): 4,000
 Direction:
 Location/Offset: Carriageway
 Cone Angle: 60 degrees
 Zero Error (mm): 0
 Test Date: 19/11/2009

Surface Type: Unpaved
 Thickness (mm): 0
 Base Type:
 Thickness (mm):
 Surface Moisture: Wet
 Moisture adjustment factor: Not adjusted

Layer Boundaries: Chainage 4,000

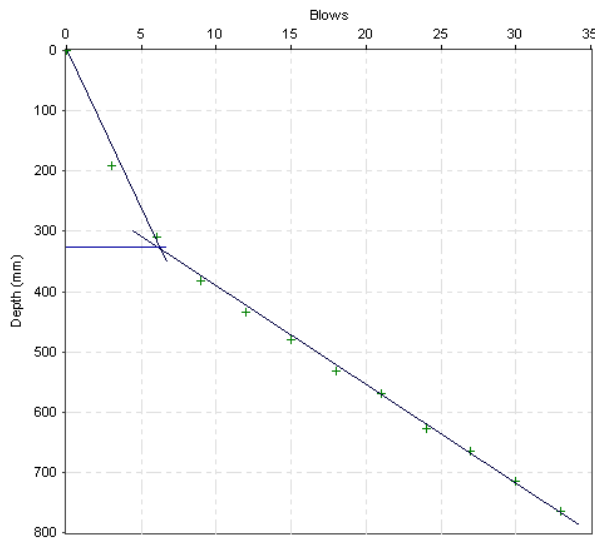

Layer Boundaries Chart

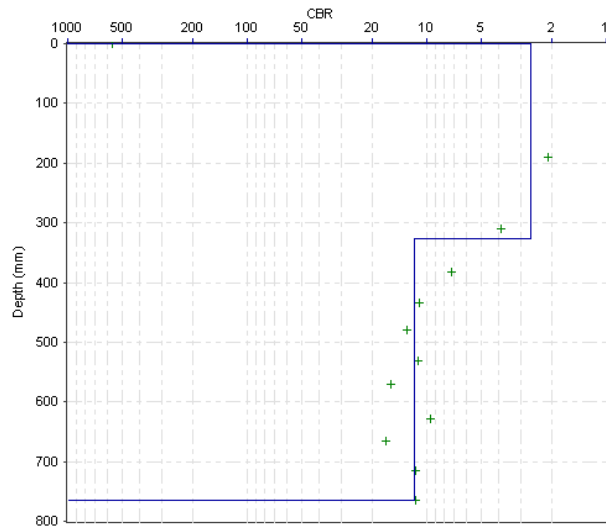

CBR Chart

Layer Properties

No.	Penetration Rate (mm/blow)	CBR (%)	Thickness (mm)	Depth to layer bottom (mm)	Position	Strength Coefficient	SN	SNC	SNP
1	53,07	3	327	327	Subgrade	--	--	--	--
2	16,41	12	438	765	Subgrade	--	--	--	--

Pavement Strength

Layer	Layer Contribution		
	SN	SNC	SNP
Surface	--	--	--
Base	--	--	--
Sub-Base	--	--	--
Subgrade	--	0,00	0,00
Pavement Strength	--	0,00	0,00

CBR Relationship:

Kleyn equation: $CBR = 410 \times (\text{Strength})^{(-1.27)}$ (when Strength > 2); $CBR = 66.66 \times (\text{Strength})^2 - 330 \times (\text{Strength}) + 563.33$ (when Strength <= 2)

Report produced by